
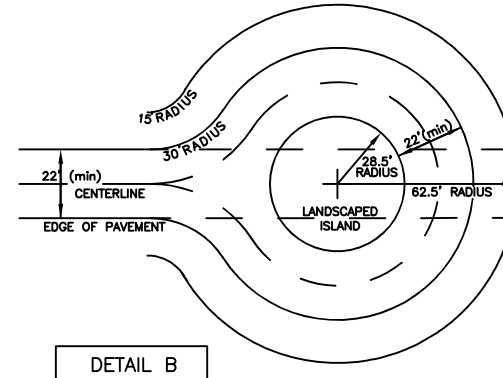


If a vision disability is preventing you from reading the following document, call the Department of Public Works at (603)528-6379 for assistance.

## D26 – TYPICAL CUL DE SAC DETAIL

NOT TO SCALE

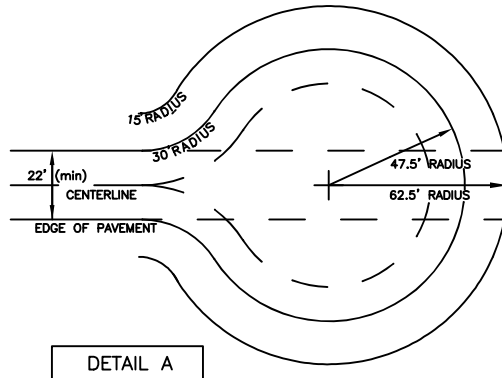

**CUL-DE-SAC CONSTRUCTION NOTES:**

1. DEAD END WAYS SHOULD BE AVOIDED, HOWEVER IF THIS IS NOT POSSIBLE, THE CUL-DE-SAC MUST BE PROVIDED WITH A TURNAROUND AT THE CLOSED END.
2. ALL CUL-DE-SAC CONSTRUCTION SHALL BE MADE IN ACCORDANCE WITH ONE OF THE ABOVE DETAILS AND IS SUBJECT TO APPROVAL OF THE DIRECTOR OF PUBLIC WORKS.
3. ALL ROAD CONSTRUCTION SHALL BE IN CONFORMANCE WITH THE REQUIREMENTS OF THE ROAD CONSTRUCTION STANDARDS FOR THE CITY OF LACONIA.
4. ALL DRAINAGE WITHIN THE PAVED ISLAND (DETAIL "A") SHALL BE GRADED TO SHED THE RUNOFF AWAY FROM THE CENTER OF THE PAVED ISLAND.
5. ALL DRAINAGE WITHIN THE LANDSCAPED ISLAND (DETAIL "B") SHALL BE GRADED TOWARD THE CENTER OF THE ISLAND AND PROVIDE FOR ADEQUATE DRAINAGE (ie. CLOSED SYSTEM) FOR DISCHARGE.
6. A CUL-DE-SAC MAY BE A TEMPORARY TURNAROUND.
7. IF A CUL-DE-SAC IS DISCONTINUED, THE PARTY RESPONSIBLE FOR ITS DISCONTINUANCE SHALL CONVERT THE CUL-DE-SAC TO A STREET SECTION TO THE SATISFACTION OF THE DIRECTOR OF PUBLIC WORKS AND THE PLANNING BOARD.
8. THE PERSON RESPONSIBLE FOR THE DISCONTINUANCE SHALL PREPARE THE PROPER DOCUMENTS TO DEED THE DISCONTINUED AREA TO THE ABUTTING PROPERTY OWNERS.

Asphalt Mix Type Top  
 9.53mm Superpave w/rap @ 75 Gyr  
 Asphalt Content: 6.4%  
 Rap AC=4.8%  
 Asphalt Binder 64-28

Asphalt Mix Type: Binder/Base  
 12.5mm Superpave w/screened  
 rap @ 50 Gyr  
 Asphalt Content: 6.10%  
 Rap AC=4.8%  
 Asphalt Binder 64-28

Asphalt Mix Type: Binder/Base  
 19mm Superpave w/rap 50 Gyr  
 Asphalt Content: 5.3%  
 Rap AC=4.8%  
 Asphalt Binder 64-28



NOTE: THESE STANDARDS ARE TO BE CONSIDERED AS MINIMUM REQUIREMENTS. ANY DEVIATION FROM THESE STANDARDS WILL REQUIRE THE LACONIA DEPT. OF PUBLIC WORKS APPROVAL.

**LACONIA DEPARTMENT OF PUBLIC WORKS**

27 Bisson Avenue  
 Laconia, NH 03246

Phone: (603) 528-6379  
 Fax: (603) 527-1298